
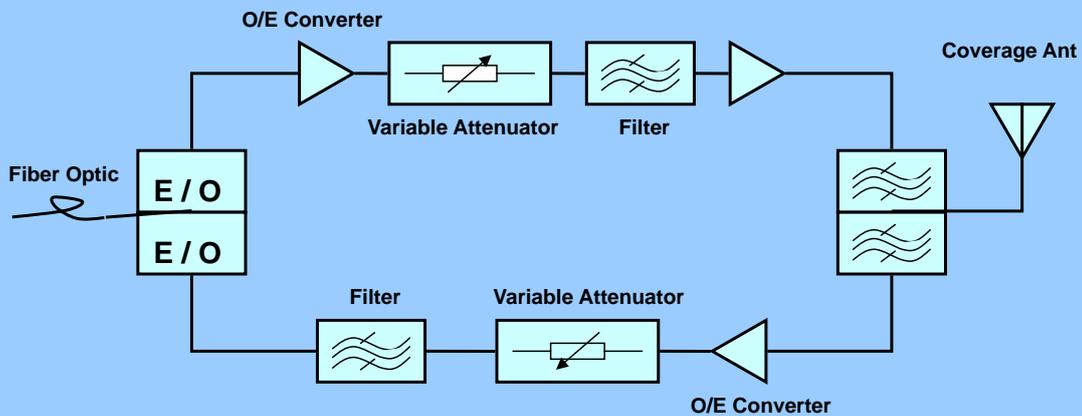


TETRA UÍVÓÖŠÄÜÓÚÒÖÈVÓÜ

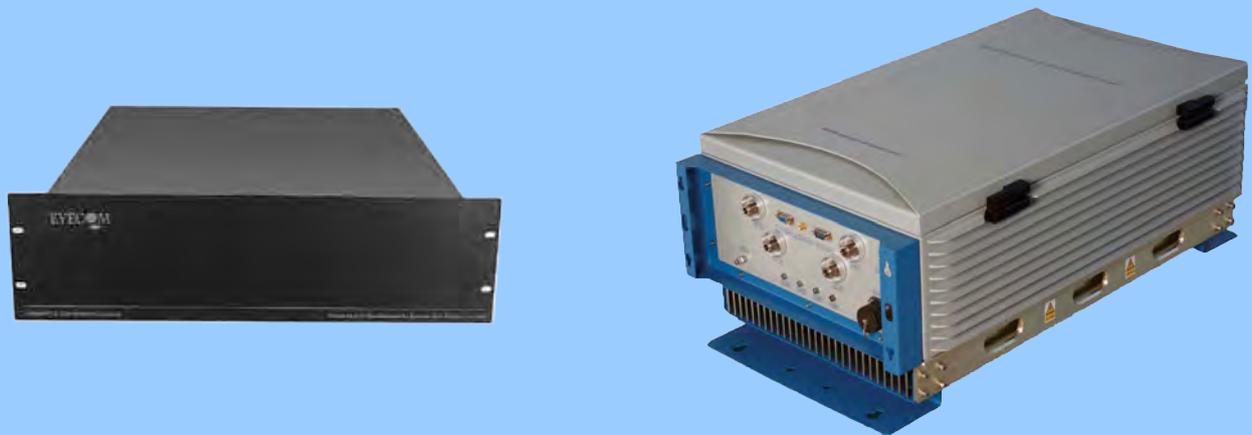

TETRA UÍVÓÖŠÄÜÓÚÒÖÈVÓÜ Repeater for enhancing coverage
In demanding environments

- Supports 12.5KHz and 25KHz channels


Turnkey coverage solutions

The Eyecom range of repeater products are class-leading in their design, functionality and extreme reliability and with our broad range of available repeaters we are able to tailor a solution that bestfits any customer's need.

The Eyecom UJ 30 Repeater is the ideal choice

where maximum coverage distance or area is required. They are available as either band selective or channel selective and with the option of either on-site configuration of remotely via the Eyecom NMS (Network Management Software).

Typical applications include: Long tunnel sections, in-building systems and large area outdoor coverage.

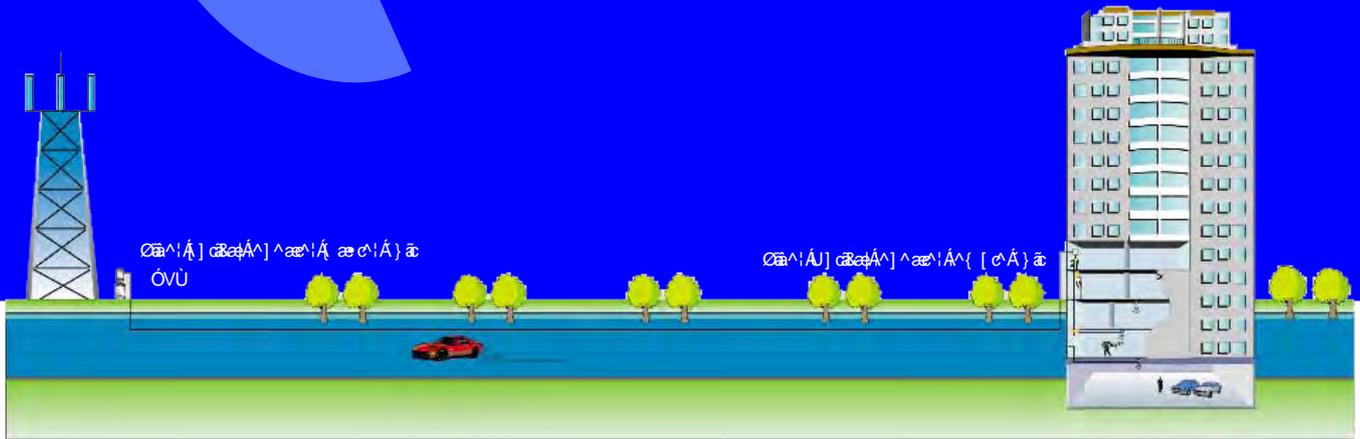

Eyecom TETRA Specification

Frequency Bands Adjust able in range
 380- 460 MHz / 806-870MHz

For other frequency band
 Variations, contact your dealer
 Of the manufacturer

Maximum Output Power +36 dBm (with 1 carrier)
 +33 dBm (with 2 carrier)
 +30 dBm (with 4 carrier)
 +27 dBm (with 8 carrier)

Gain 1 €-Í 0 àÓ

Power Supply 220 VAC

RF Connector N-F or Customized

Optical connectors ÁÒÈÉÚÓÀ !ÁÔ •q { ã^à

Compliant to ETSI 101789
 EN300394
 EN60950
 EN50121
 EN301489

For solution specific requirements, please contact our sales!

Eyecom company policy is one of continuing improvement, therefore we reserve the right to change this specification without notice.

RESELLER:

MANUFACTURER:



Gaopu Road No.1021-1023,
 National Software Industry Park,
 Guangzhou, China.
 Phone +86 20 37020080
 Fax +86 20 37020081
 www.eyecom-telecom.com